



TUMBLE DRYERS | GREEN EVOLUTION



FAGOR INDUSTRIAL



Tumble Dryers

FED - 25 M

FED - 35 M

FED - 50 M

Economic Line

SIMPLE BUT WITH THE SAME PERFORMANCE AND ROBUSTNESS



873FGD7E

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity, avoiding the tangling of big pieces.
- Frequency inverter: controls rotating speed and reverse drum action.
- Drum motion by direct drive-gearbox transmission.
- OPL ↔ Vended
- Fagor dryers can be easily converted from OPL to Self-service and vice-versa.

- Cool Down: Anti-wrinkle at the end of cycle.
- Filter drawer with wide surface and improved airflow made of stainless steel.
- Outer casing in White painted galvanized steel.
- Radial airflow circuit.
- Ergonomic big loading door with a 180° opening.

- **M Control**: easy and intuitive electronic control with time and temperature selection.
- "Coin ready" M control is ready for the vended laundry. Compatible with almost all payment options.


OPTIONS:

- Optional screen to view time, temperature and program (up to 3 programs). The technical menu can also be accessed without having to use the console.



Add the optional external console or the easy display for more control of the process:

- Up 10 programs.
- Drum speed.
- Statistics.
- Technical menu.



Call 855-Summit9

Sales@SummitLaundry.com


120 Spagnoli Rd, #1B

Melville, NY 11747



| TECHNICAL DATA | UNIT. | FED- 25 | FED 35 | FED- 50 | | | |
|--|-------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| CAPACITY | | | | | | | |
| Capacity 1/18 | lb | 26 | 40 | 60 | | | |
| Capacity 1/20 | lb | 25 | 35 | 50 | | | |
| Hourly Output * | lb/h | 62/ 6 | 68 / 9 | 88 / 6 | | | |
| Evaporation Capacity * | l/h | 14.5 | 16.3 | 20.4 | | | |
| DRUM | | | | | | | |
| Ø Drum | in | 29.50 | 29.50 | 33 | | | |
| Ø Door | in | 22.50 | 22.50 | 22.50 | | | |
| Door Center Height | in | 38.50 | 38.50 | 40.50 | | | |
| Door Bottom Height | in | 27 | 27 | 29.25 | | | |
| Drum Depth | in | 18.70 | 29.30 | 31.50 | | | |
| Drum Volume | cu ft | 7.46 | 11.64 | 16.25 | | | |
| POWER | | | | | | | |
| Drum motor power | hp | 1/2 | 1/2 | 1/2 | | | |
| Fan motor power | hp | 0.33 | 0.33 | 0.75 | | | |
| Electric heating power | kW | Not Available | Not Available | Not Available | | | |
| Total electric power (elec.model) | kW | Not Available | Not Available | Not Available | | | |
| Gas heating power | btu/h | 69,983 | 69,983 | 105,776 | | | |
| Total electric power (gas model) | kW | 0.89 | 0.89 | 1.3 | | | |
| Steam heating power | kW | 40 | 40 | 66 | | | |
| Steam heating power (gas model) | kW | 0.89 | 0.89 | 1.3 | | | |
| CONNECTIONS | | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS |
| 120 V / 60 Hz / 1 | FLA | - | 20 | - | 20 | - | 20 |
| 208-240 V / 50-60 Hz / 1 | FLA | Not Available | - | Not Available | - | Not Available | - |
| 208-240 V / 50-60 Hz / 3 | FLA | Not Available | - | Not Available | - | Not Available | - |
| Ø Gas inlet | BSP | 1/2" | | 1/2" | | 1/2" | |
| Ø Steam inlet | BSP | 3/4" | | 3/4" | | 1" | |
| Ø Condensed (Steam models) | BSP | 3/4" | | 3/4" | | 1" | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | | | |
| Net Width / Gross Width | in | 31 / 34 | | 31 / 34 | | 35 / 38 | |
| Net Depth / Gross Depth | in | 33 / 37 | | 44 / 48 | | 49 / 53 | |
| Net Height / Gross Height | in | 67 / 73 | | 67 / 73 | | 71 / 76 | |
| Height without heating battery | in | - | | - | | - | |
| Net weight / Gross weight | lb | 379 / 396 | | 412 / 440 | | 462 / 485 | |
| OTHERS | | | | | | | |
| Max airflow | CFM | 500 | | 500 | | 706 | |
| Ø Duct Size | in | 8 | | 8 | | 8 | |
| Sound level | dB | 64 | | 64 | | 65 | |

* It may vary depending on the type of heating, filter cleanliness or extraction type.

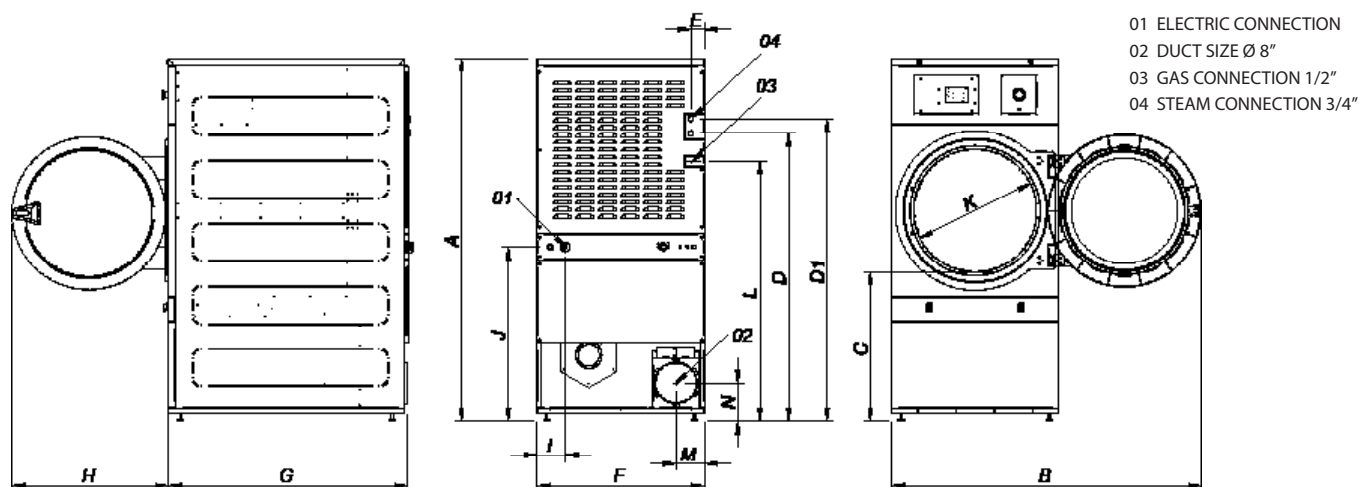

| | A | B | C | D | D1 | E | F | G | H | I | J | K | L | M | N |
|--------|----|----|-------|-------|-------|------|----|-------|----|------|----|----|-------|------|---|
| FED-25 | 67 | 57 | 27 | 54 | 56 | 3 | 31 | 34 | 29 | 3.75 | 33 | 23 | 48.25 | 5.25 | 7 |
| FED-35 | 67 | 57 | 27 | 54 | 56 | 3 | 31 | 44.25 | 29 | 3.75 | 33 | 23 | 48.25 | 5.25 | 7 |
| FED-50 | 71 | 61 | 29.25 | 56.25 | 60.25 | 4.50 | 35 | 49.50 | 29 | 8 | 34 | 23 | 53 | 5.25 | 7 |

