



**COMPACT**  
series  
PROFESSIONAL  
WASHER EXTRACTORS



01.

**MORE FEATURES**

- New TP2 programmer with touch screen. It allows to create an indefinite number of programs (26 preestablished).
- Allows importing or exporting programs and software updates via USB.
- Standard traceability: The washing process (temperatures, water levels) is stored and can be extracted to a PC via USB.
- Wash-Control, PC software for program management, traceability and other data.
- WET CLEANING ready (customize water levels and washing speed).
- Remote connection capability.
- Designed for multipayment system.
- 8 programmable automatic liquid dosing signals with timedelay element. With a choice of 6 extra signals.
- Reduced washing cycles (heating power 6 kW).

- Voltage 110-120V 1N 50/60 Hz.

02.

**MORE EFFICIENCY**

- Intelligent and manual weighing system. Automatic adjustment of water and chemicals.
- Three levels of savings.
- High Spin Factor up to **450G**. Reduces residual humidity and drying time
- Designed for use with water recovery tanks.

03.

**MORE ROBUSTNESS**

- Elegant *skinplate* panels.
- Tank, drum and blades made of SS AISI 304.
- Robust door made of aluminum.
- Industrial door lock.
- No inner drum seal.
- Industrial housing and bearings.
- Frequency inverter
- Industrial grade motor.

04.

**MORE VERSATILITY**

- OPL ↔ COIN  
Convertible from OPL to Vended, and vice versa.
- STACKABLE  
Models with front soap box
- ELECTRIC ↔ HOT WATER Standard electric model easily convertible to hot water model and vice versa.
- DRAIN VALVE ↔ DRAIN PUMP  
Easily convertible. Easy access for maintenance.
- TOP SOAP BOX  
Available with robust top soap dispenser (recommended for vended laundry).

**CHARACTERISTICS**

- Soft-mount, High-spinning washer.
- 2 standard water inlets.
- Equipped with a frequency inverter (standard 50-60 Hz). Balancing system controlled by the same inverter.
- Available with drain valve (V) or drain pump (P).
- Includes levelers.
- Drain normally closed "NC" (In case of power failure, the water stays inside the tank.)
- Tank with 4 detergent compartments.

**OPTIONS**

- Double drain (only valve model).
- Drain pump kit.
- 6 extra signals for dosing.
- Silicone door seal.
- Door with opposite opening.
- Delayed door opening.
- Plinth.
- Mop plinth w/filter (valve model).
- Front or Top soap dispenser.



Front Dispenser




Top Dispenser



LAP-0820 TP2 V DS  
LAP-1025 TP2 V DS

## TECHNICAL DATA

	UNID.	LAP-0820 TP2 V	LAP-0820 TP2 P	LAP-1025 TP2 V	LAP-1025 TP2 P
<b>DRUM</b>					
Load capacity 1:9 / 1:10	lb	20/18	20/18	24/22	21/22
Volume	CU.FT	3	3	4	4
Diameter	in	20.95	20.95	20.95	20.95
Depth	in	14.17	18.17	16.73	16.73
<b>GENERAL DETAILS</b>					
Washing speed / Spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250
G Factor	-	450	450	450	450
Self service version	-	Yes	Yes	Yes	Yes
Double drain	-	Yes	No	Yes	No
Weighing system / tilting system	-	No	No	No	No
<b>DOOR</b>					
Height center door / Height base door	in	21.15/11	21.15/11	21.15/11	21.15/11
Diameter	in	14.69	14.69	14.69	14.69
<b>DYNAMIC FORCE</b>					
Static Load	KN	1,4	1,4	1,5	1,5
Maximum Dynamic load	KN	0,5	0,5	0,6	0,6
Vertical maximum load	KN	0,64	0,64	0,75	0,75
Max revolutions	r.p.m.	1.250	1.250	1.250	1.250
Frequency of dynamic load	-	18,33	18,33	18,33	18,33
<b>POWER</b>					
Motor	HP	1	1	1	1
Electric heating	kW	6	6	6	6
Hot water heating	kW	0	0	0	0
Max. power electric model	kW	6.25	6.25	6.25	6.25
Max. power HW model	kW	0.75	0.75	0.75	0.75
Max. power steam	kW	No	No	No	No
<b>CONNECTIONS</b>					
Electrical	Volts / Hz / Phase	110-120 / 50-60 / 1	110-120 / 50-60 / 1	110-120 / 50-60 / 1	110-120 / 50-60 / 1
Full Load Amps	A	10	10	10	10
Water inlet	in	3/4"	3/4"	3/4"	3/4"
Drain	in	2"	1" (pump)	2"	1" (pump)
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Width / width w/package	in	26.77/28	26.77/28	26.77/28	26.77/28
Depth / depth w/package	in	27.4/33	27.4/33	30.39/33	30.39/33
Height / height w/package	in	41/44.5	41/44.5	41/44.5	41/44.5
Net weight / gross weight	lb	309/331	309/331	311/352	311/352

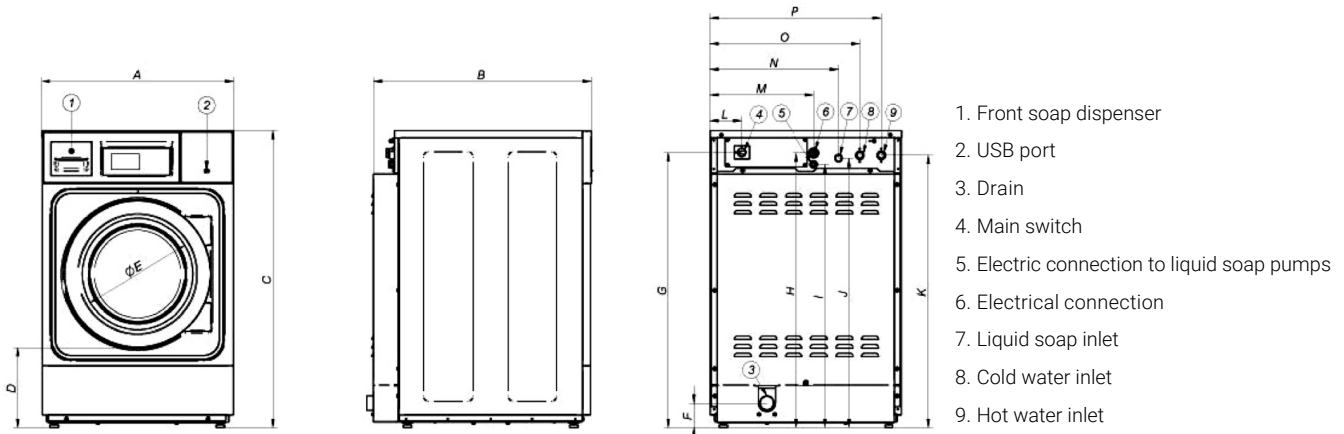

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-0820 TP2 V	26.77	27.48	40.94	10.94	14.69	3.39	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	7.83
LAP-0820 TP2 P	26.77	27.48	40.94	10.94	14.69		37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	
LAP-1025 TP2 V	26.77	30.39	40.94	10.94	14.69	3.39	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	7.83
LAP-1025 TP2 P	26.77	30.39	40.94	10.94	14.69		37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	