



TUMBLE DRYERS | GREEN EVOLUTION



Tumble Dryers

FD - 30 TP2

ADVANCE

HIGH PERFORMANCE, EFFICIENT
TECNOLOGY, ADVANCE DRYING



873FGD7E

- User friendly and totally programmable microprocessor with a 7" **Touch II screen**
- USB Connection to upload programming or download traceability, data analysis. You can program time of the day promotions and discounts automatically.
- Videos shown on display: ads, instructions (useful for coin laundry)

- Anti-wrinkle system.
- End of cycle tone.
- Emergency stop button and security micro magnet to stop operation.
- Drum motion by direct drive-gearbox transmission.
- Automatic reverse rotation of the drum.
- Frequency inverter for smoother operation.

ŽAB <=> HWVW: 8SYadVckVtEUS TWV6{k
La` hVW Xa_ AB> fa EWZEVh[UWS V vice versaž

- Easy-to-clean, outer casing in gray skin-plate with stainless steel look.
- Ergonomic big loading door with a 180° opening and the option of double glazing.
- Stainless steel drum.
- Axial-radial airflow, resulting in greater drying efficiency.
- Drum with special smooth perforations for the gentle treatment of fabrics.
- Stainless steel lint filter at the bottom for more ergonomic, larger, and improved airflow.


OPTIONS:

- iDry System (Intelligent moisture sensor)
- FK System (Integrated fire prevention system).
- Double door-glass.
- Stainless steel side panels.
- Stainless steel front panel.



TECHNICAL DATA	UNIT.	FD 30 TP2 - ADVANCE	
CAPACITY			
Capacity 1/18	lb	33	
Capacity 1/20	lb	30	
Hourly Output DYNAMIC*	lb/h	66	
Evaporation capacity DYNAMIC*	l/h	15.40	
DRUM			
Ø Drum	in	29.50	
Ø Drum door	in	22.60	
Door center height	in	38.50	
Bottom center height	in	27	
Drum depth	in	24	
Drum volume	cu ft	9.54	
POWER			
Drum motor power	HP	1/2	
Fan motor power DYNAMIC	HP	0.33	
Electric heating power (elec.model)	kW	Not Available	
Total electric power (elec.model) DYN	kW	Not Available	
Gas heating power	btu	70,000	
Total electric power (gas model) DYN	kW	0.67	
Steam heating power ALL RANGES	kW	30	
Steam heating power (gas model) DYN	kW	0.67	
CONNECTIONS		ELECTRICAL	STEAM / GAS
120 V / 60 Hz / 1	FLA	-	20
208-240 V / 50-60 Hz / 1	FLA	Not Available	-
208-240 V / 50-60 Hz / 3	FLA	Not Available	-
Gas connection	in	1/2"	
Ø Steam inlet		3/4"	
Ø Condensed (Steam models)		3/4"	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	in	30.9 / 34	
Net Depth / Gross Depth	in	38.9 / 42.2	
Net Height / Gross Height	in	66.7 / 72.4	
Height without heating battery	in	-	
Net weight / Gross weight	lb	397 / 419	
OTHERS			
Max airflow DYNAMIC	CFM	500	
Ø Fume exhaust	in	8	
Sound level DYNAMIC	dB	64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

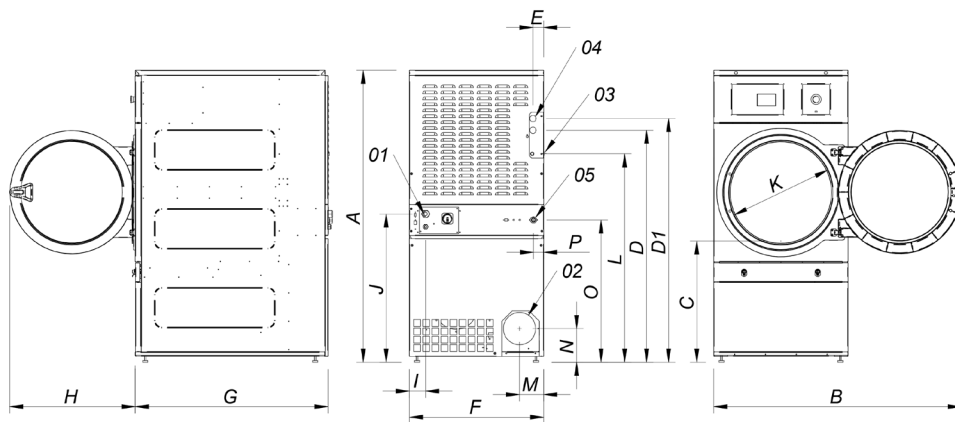

DIMENSIONS (in)	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
FD 30	66.7	57.0	27.1	53.3	56.0	2.7	2.7	30.9	38.9	28.9	3.7	34.3	22.6	48.3	5.2	7.1	32.7	2.6

