



TUMBLE  
DRYERS

GREEN  
EVOLUTION

**FAGOR**   
FAGOR INDUSTRIAL



# Tumble Dryers

FED - 30 M

## Economic Line

SIMPLE BUT WITH THE SAME  
PERFORMANCE AND ROBUSTNESS

AUTOREVERSE  
DRUM

EASY  
CONTROL

873FGD7E

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity, avoiding the tangling of big pieces.
- Frequency inverter: controls rotating speed and reverse drum action.
- Drum motion by direct drive-gearbox transmission.
- **OPL ↔ Vended**
- Fagor dryers can be easily converted from OPL to Self-service and vice-versa.

- Cool Down: Anti-wrinkle at the end of cycle.
- Filter drawer with wide surface and improved airflow made of stainless steel.
- Outer casing in White painted galvanized steel.
- Radial airflow circuit.
- Ergonomic big loading door with a 180° opening.

- **M Control**: easy and intuitive electronic control with time and temperature selection.
- "Coin ready" M control is ready for the vended laundry. Compatible with almost all payment options.



Add the optional external console or the easy display for more control of the process:

- Up 10 programs.
- Drum speed.
- Statistics.
- Technical menu.

### OPTIONS:

- Optional screen to view time, temperature and program (up to 3 programs). The technical menu can also be accessed without having to use the console.



**SUMMIT**  
SummitLaundry.com

Call 855-Summit9


Sales@SummitLaundry.com  
120 Spagnoli Rd, #1B  
Melville, NY 11747





TECHNICAL DATA		UNIT.	FED 30 M - ECON
CAPACITY			
Capacity 1/18	lb		33
Capacity 1/20	lb		30
Hourly Output ECON*	lb/h		66
Evaporation capacity ECON*	l/h		15.40
DRUM			
Ø Drum	in		29.50
Ø Door (load hole)	in		22.50
Door center height	in		38.50
Bottom center height	in		27
Drum length	in		24
Drum volume	cu ft		9.54
POWER			
Drum motor power	HP		1/2
Fan motor power ECON	HP		0.33
Electric heating power ALL RANGES	kw		Not Available
Total electric power (elec.model)	kw		Not Available
Gas heating power ALL RANGES	btu		70000
Total electric power (gas model)	kw		0.67
Steam heating power ALL RANGES	kw		30
Steam heating power (gas model)	kw		0.67
CONNECTIONS		ELECTRICAL	STEAM / GAS
120 V / 60 Hz / 1	FLA	-	20
208-240 V / 50-60 Hz	FLA	Not Available	-
208-240 V / 50-60 Hz / 3	FLA	Not Available	-
Ø Gas inlet	BSP		1/2"
Ø Steam inlet	BSP		3/4"
Ø Condensed (Steam models)	BSP		3/4"
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	in		31 / 34
Net Depth / Gross Depth	in		39 / 42.2
Net Height / Gross Height	in		67 / 72.4
Height without heating battery	in		-
Net weight / Gross weight	lb		397 / 419
OTHERS			
Max airflow ECON	m3/h		850
Ø Fume exhaust	in		7.87
Sound level ECON	dB		64

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

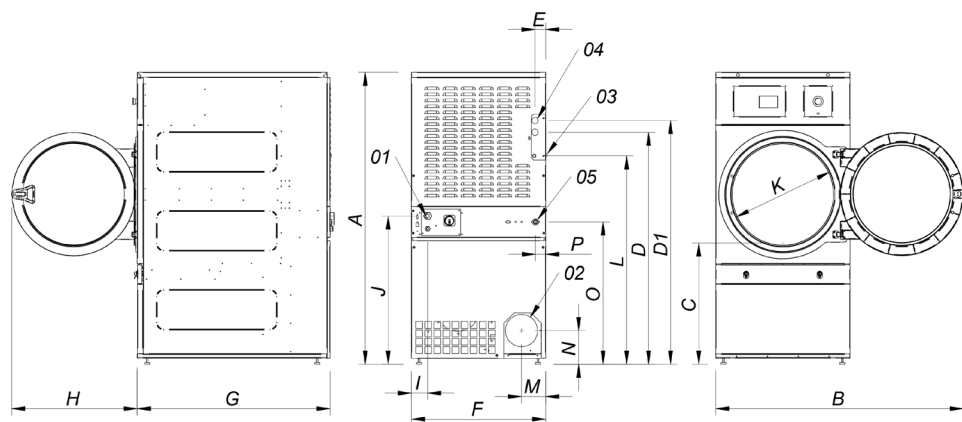

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø 7.87"
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
FED 30 M	66.7	57.0	27.1	53.3	56.0	2.7	2.7	30.9	38.9	28.9	3.7	34.3	22.6	48.3	5.2	7.1	32.7	2.6

