


MP SERIES
Flat Work Ironers
 PS-50/200 PS-50/260 PS-50/330

**THE LAST BENEFITS
 AND TECHNOLOGY AT YOUR SERVICE**



- Maintenance
CARE
 - INVERTER
 - MP
ELECTRONIC
CONTROL
 - HIGH-
TECH
ROLL
 - RADIANT
BURNER
- Optional
- Chromed
ROLL
 - SMART
SYSTEM


CHARACTERISTICS

- Dry and iron the plain clothes in one execution.
- Engine with frequency inverter.
- Electric, steam or gas Heated models.
- Murals, introduction and reception of garments from the front.
- Automatic cooling up 176°F (80° C).
- Two versions of gas model: Gas model with atmospheric burner and Gas model with radiant burner. 25% savings in gas consumption and 25% more by production.
- Electronic microprocessor with 7 preset speeds.
- Introduction and ironing by No-mex-Polyester bands.
- CE, ETL and gas certifications.
- A Ø 20" (500 mm) steel roller polished.
- Double emergency stop: save and stop button bar above the control panel.
- Overheat safety by 2 thermostats.
- Stainless steel outer panels.
- 3 working lengths 79", 105" and 130" (2,000, 2,600 and 3,300 mm).

OPTIONS:

- SMART SYSTEM (patented): Humidity control by a regulation system automatic speed ironing depending on the degree of residual moisture.
- Large chrome roller durability.
- Roller rotation inversion.
- Special voltages.

MODELS	PS-50/200 MP	PS-50/260 MP	PS-50/330 MP			
Theoretical production 20-25% humidity - lbs/h (kg/h)	110/70 (50/70)	132/80 (60/80)	176/120 (80/120)			
Theoretical production 45% humidity, Radiant burner - Lbs/h (kg/h)	137/87 (62/87)	165/100 (75/100)	220/150 (100/150)			
Ø Roller - in (mm)	20" (500)	20" (500)	20" (500)			
Useful width - in (mm)	79" (2000)	105" (2600)	130" (3300)			
Height ground-bands introduction - in (mm)	40.5" (1030)	40.5" (1030)	40.5" (1030)			
Working speed - mt/min	1.5-8	1.5-8	1.5-8			
Power						
Heating Power "Electric Model" - Kw	31.5	40.5	54			
Total electric power "Electric Model" -Kw	32.12	41,37	54.87			
Heating Power "Gas Model" - Kw	40	55	69			
Total electric power "Gas Model" - Kw	0.87	0.87	0.87			
Heating Power "Steam Model" - Kw	50	64	81			
Total electric power "Steam Model" - Kw	0.62	0.87	0.87			
Roller engine power - HP (Kw)	0.5 (0.37)	0.5 (0.37)	0.5 (0.37)			
Fan engine power - HP (Kw)	0.33 (0.25) "gasx2"	0.33 (0.25) "gasx2"	0.33 (0.25) "gasx2"			
Connections						
	Electric	Steam/Gas	Electric	Steam/Gas	Electric	Steam/Gas
Voltage 230V / 60 / 3~ - 120 / 60 / 1~ III + T - No. x mm2/ A	4 x 35 / 100A	120/50/1 ~ 15A	4 x 50 / 125A	120/50/1 ~ 15A	4 x 70 / 160A	120/50/1 ~ 15A
Voltage 400V / III + N + T - No. x mm2/ A	5 x 10 / 50A	5 x 2,5 / 2A	5 x 16 / 63A	5 x 2,5 / 2A	5 x 25 / 100A	5 x 2,5 / 2A
Ø Gas inlet - in (mm)	1 (22)		1 (22)		1 (22)	
Ø Steam Inlet - in (mm)	3/4 (19.5)		3/4 (19.5)		3/4 (19.5)	
Condensate Return - in (mm)	1/2 (12.7)		1/2 (12.7)		1/2 (12.7)	
Dimensions / Packaging Dimensions						
Width / Width - in (mm)	111 / 118.5 (2810 / 3010)		135 / 142 (3420 / 3610)		162 / 170 (4120 / 4310)	
Deep / Deep - in (mm)	38 / 45 (956 / 1150)		38 / 45 (956 / 1150)		38 / 45 (956 / 1150)	
High / High - in (mm)	47 / 59 (1189 / 1500)		47 / 59 (1189 / 1500)		47 / 59 (1189 / 1500)	
Weight / Weight - lbs (kg)	2039 / 2147 (925 / 974)		2645 / 2800 (1200 / 1270)		3166 / 3252 (1436 / 1475)	
Volume - m³	3.25 / 5.19		3.96 / 6.23		4.77 / 7.43	
Others						
No. of steam output - No.	1		2		3	
Ø Fog outlet - in (mm)	6 (153)		6 (153)		6 (153)	
Suction air flow - m³/h	600		1200		1200	
Sound level - db	63		65		65	

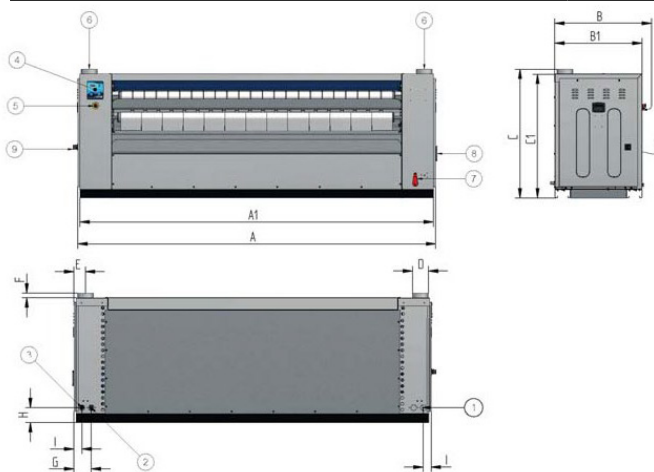

- ① Electric connection
- ② Gas or steam inlet
- ③ Steam outlet
- ④ Control Panel
- ⑤ Emergency stop
- ⑥ Fog outlet
- ⑦ Handle contactor
- ⑧ Handle
- ⑨ General switch

	A	B	C	A1	B1	C1	D	E	F	G	H	I
PS-50/200	113"	38"	48.5"	111"	33"	47"	Ø 153	3"	4"	8"	6"	2"
PS-50/260	135"	38"	48.5"	135"	33"	47"	Ø 153	3"	4"	8"	6"	2"
PS-50/330	164.5"	38"	48.5"	162"	33"	47"	Ø 153	3"	4"	8"	6"	2"



Consult your Fagor dealer for more details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice.