



TUMBLE DRYERS | GREEN EVOLUTION



FAGOR INDUSTRIAL



Stack Dryers

FD-2-25-TP2

FD-2-35-TP2

ADVANCE

HIGH PERFORMANCE, EFFICIENT TECHNOLOGY, ADVANCE DRYING




873FGD7E

- User friendly and totally programmable microprocessor with a 7" **Touch II screen**
- USB Connection to upload programming or download traceability, data analysis. You can program time of the day promotions and discounts automatically.
- Videos shown on display: ads, instructions (useful for coin laundry)



- Anti-wrinkle system.
- End of cycle tone.
- Emergency stop button and security micro magnet to stop operation.
- Drum motion by direct drive-gearbox transmission.
- Automatic reverse rotation of the drum.
- Frequency inverter for smoother operation.
- OPL ↔ Vended Fagor dryers can be easily converted from OPL to Self-Service and viceversa.



- Easy-to-clean, outer casing in gray skin-plate with stainless steel look.
- Ergonomic big loading door with a 180° opening and the option of double glazing.
- Axial-radial airflow, resulting in greater drying efficiency.
- Drum with special smooth perforations for the gentle treatment of fabrics.
- Stainless steel lint filter at the

bottom for more ergonomic, larger, and improved airflow.

OPTIONS:

- iDry System (Intelligent moisture sensor)
- FK System (Integrated fire prevention system).
- Double door-glass.
- Stainless steel side panels.
- Stainless steel front panel.




120 Spagnoli Rd, #1B, Melville NY 11747
855-SUMMIT9 • sales@summitlaundry.com
www.summitlaundry.com



TECHNICAL DATA	UNIT.	FD2 - 25 TP2	FD2 - 35 TP2		
CAPACITY					
Capacity 1/18	lb (kg)	25.8 (11.7) x 2	40.3 (18.3) x 2		
Capacity 1/20	lb (kg)	23.1 (10.5) x 2	36.4 (16.5) x 2		
Production Output*	lb/h	76	80		
Evaporation capacity*	l/h	16.5	18.6		
DRUM					
Ø Drum	in	29.50	29.50		
Ø Door	in	22.60	22.60		
Door center height	in	21.50 / 60	21.50 / 60		
Door bottom height	in	10.2 / 48.6	10.2 / 48.6		
Drum depth	in	18.7	29.4		
Drum volume	cu ft	7.41	11.65		
POWER					
Drum motor power	HP	1 x 2	1 x 2		
Fan motor power	HP	0.33 x 2	0.33 x 2		
Electric heating power	kW	12 x 2	12 x 2		
Total electric power (elec.model)	kW	25.34	25.34		
Gas heating power	Btu/h	41,000 x 2	41,000 x 2		
Total electric power (gas model)	kW	1.34	1.34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
120 V / 60 Hz / 1	FLA	-	15 A	-	15 A
208-240 V / 50-60 Hz / 1 / 3	FLA	Not Available	-	Not Available	-
Gas connection	in	-	0.50	-	0.50
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	in	31 / 34		31 / 34	
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52	
Net Height / Gross Height	in	78 / 84		78 / 84	
Net weight	lb	573		639.2	
OTHERS					
Max airflow	CFM (m3/h)	294.29 (500) x2		294.29 (500) x2	
Ø Duct Size	in	8		8	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

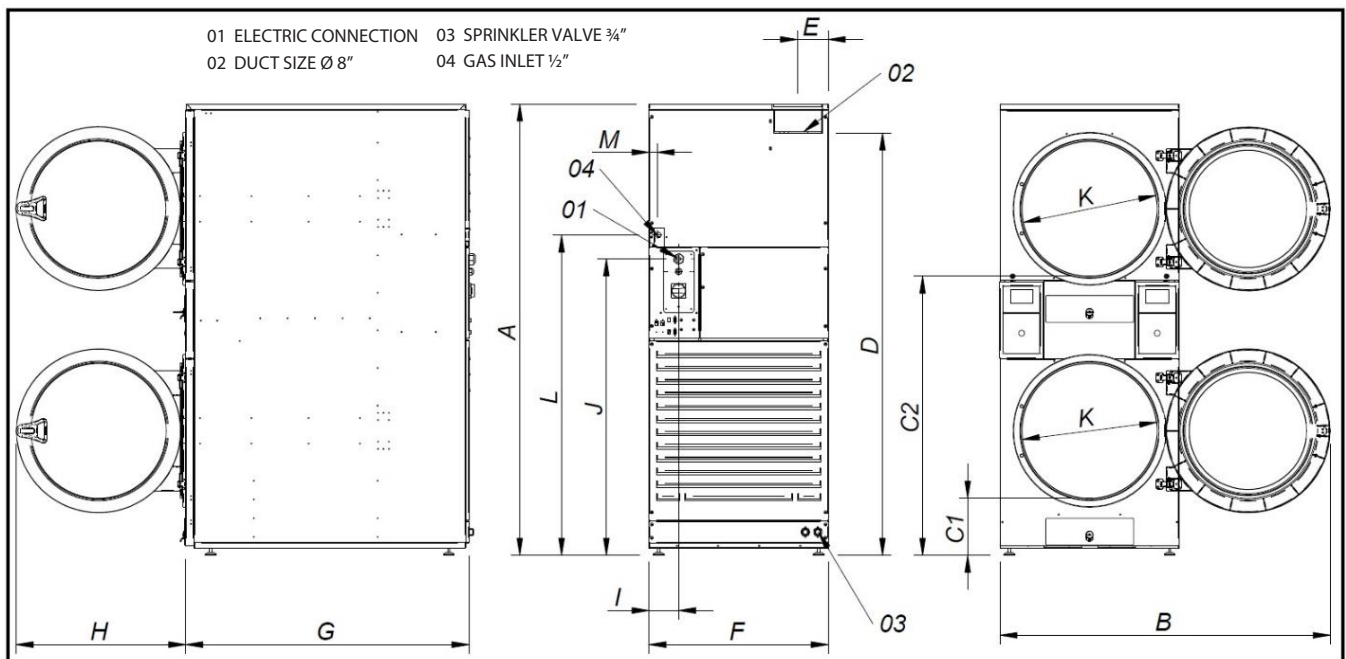

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FD2-25	78	57	10.2	48.60	63.75	5.25	31	38.25	29	5.11	50.20	22.60	55.70	1.40
FD2-35	78	57	10.2	48.60	63.75	5.25	31	48.90	29	5.11	50.20	22.60	55.70	1.40

