




TUMBLE DRYERS | GREEN EVOLUTION

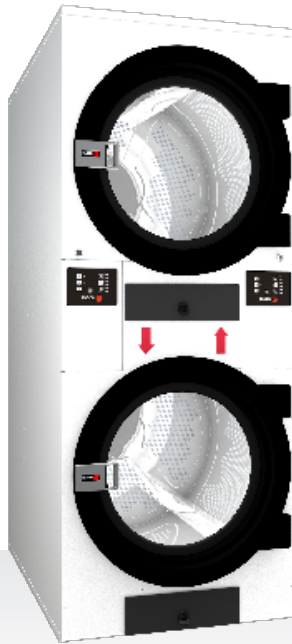

Stack Dryers FED-2-50-M Economic line

SIMPLE BUT WITH THE SAME
PERFORMANCE AND ROBUSTNESS

EASY
CONTROL

AUTOREVERSE
DRUM

CHARACTERISTICS

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity, avoiding the tangling of big pieces.
 - Frequency inverter: controls rotating speed and reverse drum action.
 - Drum motion by direct drivegear-box transmission.
 - OPL - Vended
- Fagor dryers can be easily converted from OPL to Vended and vice versa.

- Cool Down: Anti-wrinkle at the end of cycle.
- Filter drawer with wide surface and improved airflow made of stainless steel.
- Outer casing in White painted galvanized steel.
- Radial airflow circuit.
- Ergonomic big loading door with a 180° opening.

- M Control : easy and intuitive electronic control with time and temperature selection.
- "Coin ready" M control is ready for the vended laundry. Compatible with almost all payment options. Add the optional external console or the easy display for more control of the process:
- Up 10 programs.
- Drum speed.
- Statistics.
- Technical menu.

OPTIONS:

- Optional screen to view time, temperature and program (up to 3 programs). The technical menu can also be accessed without having to use the console.

SUMMIT™
SummitLaundry.com

120 Spagnoli Rd, #1B, Melville NY 11747
855-SUMMIT9 • sales@summitlaundry.com
www.summitlaundry.com




www.SummitLaundry.com



TECHNICAL DATA

	UNIT.	FED-2-50-M
CAPACITY		
Capacity 1/18	lb	105.8
Capacity 1/20	lb	97
Production Output	lb/h	194
Evaporation capacity	l/h	44
DRUM		
Ø Drum	in	32,87
Ø Door	in	22,59
Door center height	in	21.6/63,7
Door bottom height	in	10,70/52,04
Drum depth	in	31,49
Drum volume	cu ft	15,46
POWER		
Drum motor power	HP	0,5 x2
Fan motor power	HP	0,75 x2
Electric heating power	kW	-
Total electric power (elec.model)	kW	-
Gas heating power	Btu/h	102364,2
Instant propane gas consumption (G31)	Kg/h	1,03 x 2
Instant natural gas consumption (G20)	m3/h	1,27 x 2
Total electric power (gas model)	kW	1,94
CONNECTIONS		
Voltage 230V - 1 PH + + G	Nº x mm2 / A	3 x 1,5 / 20A
Voltage 230V - 3 PH + G	Nº x mm2 / A	-
Voltage 440V - 3 PH + N + G	Nº x mm2 / A	-
Ø Gas inlet	BSP	3/4"
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	in	34,3 / 37,4
Net Depth / Gross Depth	in	52,3 / 55,6
Net Height / Gross Height	in	83,4 / 88,7
Net weight / Gross	lb	824.7/868.8
OTHERS		
Max airflow	CFM	529.7 x 2
Ø Duct Size	in	9,9
Sound level	dB	69

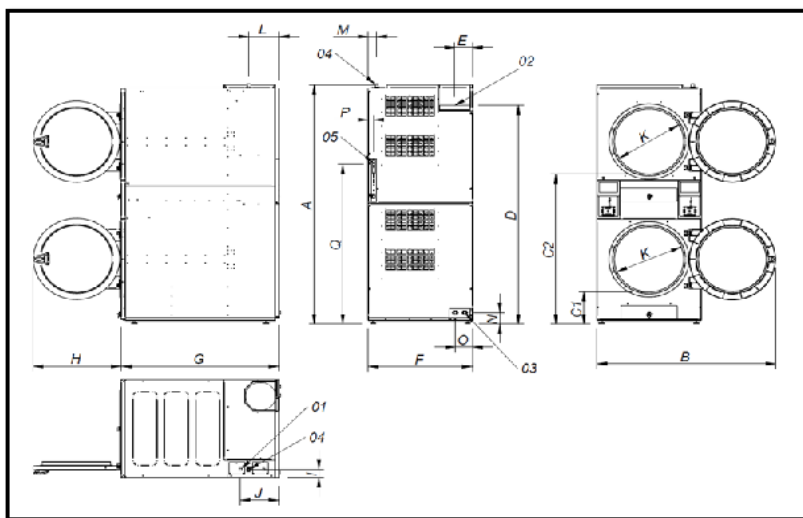

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTPUT Ø250
- 03 GAS INLET 1/2"
- 04 ETHERNET CONNECTION
(ONLY TP2)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
FED-50-M	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	45	1416