



TUMBLE DRYERS | GREEN EVOLUTION



FAGOR INDUSTRIAL



Stack Dryers

FED2-25-35

Economic Line

SIMPLE BUT WITH THE SAME PERFORMANCE AND ROBUSTNESS



873FGD7E

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity, avoiding the tangling of big pieces.
 - Frequency inverter: controls rotating speed and reverse drum action.
 - Drum motion by direct drive-gearbox transmission.
- OPL ↔ Vended

Fagor dryers can be easily converted from OPL to Vended and vice versa.



- Cool Down: Anti-wrinkle at the end of cycle.
- Filter drawer with wide surface and improved airflow made of stainless steel.
- Outer casing in White painted galvanized steel.
- Radial airflow circuit.
- Ergonomic big loading door with a 180° opening.

- **M Control**: easy and intuitive electronic control with time and temperature selection.
- "Coin ready" M control is ready for the vended laundry. Compatible with almost all payment options.



Add the optional external console or the easy display for more control of the process:

- Up 10 programs.
- Drum speed.
- Statistics.
- Technical menu.

OPTIONS:

- Optional screen to view time, temperature and program (up to 3 programs). The technical menu can also be accessed without having to use the console.




SUMMIT
SummitLaundry.com

120 Spagnoli Rd, #1B, Melville NY 11747
855-SUMMIT9 • sales@summitlaundry.com
www.summitlaundry.com



TECHNICAL DATA	UNIT.	FED2 - 25 M	FED2 - 35 M		
CAPACITY					
Capacity 1/18	lb (kg)	25.8 (11.7) x 2	40.3 (18.3) x 2		
Capacity 1/20	lb (kg)	23.1 (10.5) x 2	36.4 (16.5) x 2		
Production Output*	lb/h	76	80		
Evaporation capacity*	l/h	16.5	18.6		
DRUM					
Ø Drum	in	29.50	29.50		
Ø Door	in	22.60	22.60		
Door center height	in	21.50 / 60	21.50 / 60		
Door bottom height	in	10.2 / 48.6	10.2 / 48.6		
Drum depth	in	18.7	29.4		
Drum volume	cu ft	7.41	11.65		
POWER					
Drum motor power	HP	1/2 x 2	1/2 x 2		
Fan motor power	HP	0.33 x 2	0.33 x 2		
Electric heating power	kW	Not Available	Not Available		
Total electric power (elec.model)	kW	Not Available	Not Available		
Gas heating power	Btu/h	41,000 x 2	41,000 x 2		
Total electric power (gas model)	kW	1.34	1.34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
120 V / 60 Hz / 1	FLA	-	15 A	-	15 A
208-240 V / 50-60 Hz / 1 / 3	FLA	Not Available	-	Not Available	-
Gas connection	in	-	0.50	-	0.50
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	in	31 / 34		31 / 34	
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52	
Net Height / Gross Height	in	78 / 84		78 / 84	
Net weight	lb	573		639.2	
OTHERS					
Max airflow	CFM (m3/h)	294.29 (500) x2		294.29 (500) x2	
Ø Duct Size	in	8		8	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

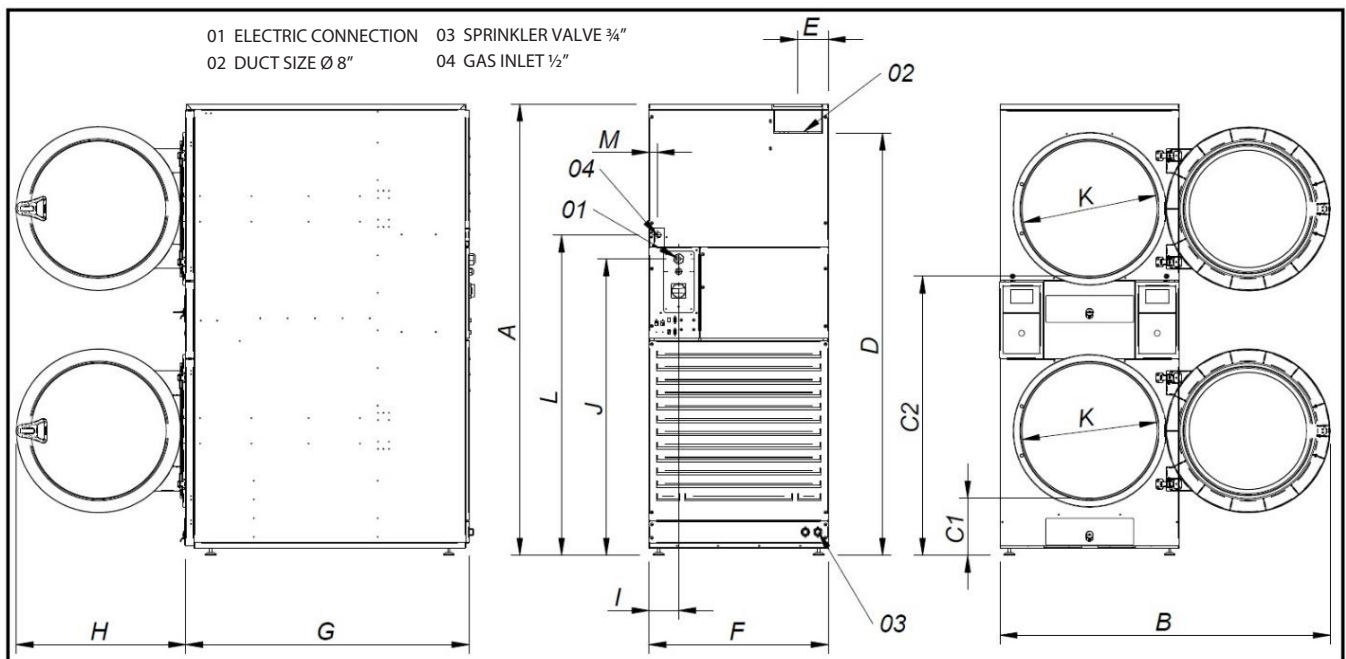

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FED2-25	78	57	10.2	48.60	63.75	5.25	31	38.25	29	5.11	50.20	22.60	55.70	1.40
FED2-35	78	57	10.2	48.60	63.75	5.25	31	48.90	29	5.11	50.20	22.60	55.70	1.40