



WASHING



HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY FWH-60 TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High Spin Up to 500 G Force

EFFICIENCY

- Energy Optimization.
- Optimal load.
- KRS: Water Recovery tank ready.
- Low water consumption.

VERSATILITY

- Custom - Make to order
- OPL or COIN.
- Electric or Hot water.
- Drain valve or Pump.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Large Loading Doors: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
 - Technical setting: telemetry, error diagnosis, monitoring, software updates.
- Easy maintenance with external console (optional)

OTHERS

- Grey skin plate outer casing.
- Drum in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- CB and WRAS approved product.
- High spin washers with suspended drum.

OPTIONS

- Extra dosing pump DB-1.
- Double drain.
- Levelling pads.
- Automatic weighing sensor system on feet.
- Relay card with 6 extra dosing signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized coating.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth to level all machines from top.
- Plinth to align the door base at 850mm).
- Plinth for washing mops.
- Stainless steel outer casing.
- Stainless steel front panel
- Coin/token kit.
- Auto unlock kit for the door.




SUMMIT
SummitLaundry.com

Call 855-Summit9
Sales@SummitLaundry.com
120 Spagnoli Rd, #1B
Melville, NY 11747

DRUM				U.	FWH - 65 TP2	
Load capacity 1:9 / 1:10				Lb.	68.4/61.7	
Volume				CU.FT	9.9	
Diameter				In	30.3	
Depth				In	23	
GENERAL DETAILS						
Washing speed / Spinning speed				r.p.m.	45/1024	
G Factor				-	450	
Maximum force transmitted				KN	5.59 ± 1.75	
Frequency-dynamic force				Hz	15	
Noise level				dB	<70	
Coin laundry version				-	Yes	
Double drain				-	Opt.	
Weighing System / Tilting System				-	Opt./No	
SLUICE option				-	No	
DOOR						
Height center door / Height door				In	34.1/22.1	
Diameter				In	18.1	
POWER						
Motor				Hp	5.4	
Electric heating power				kW	18	
Total electric power (electric model)				kW	19.2	
Total electric power (hw, steam model)				kW	4	
CONNECTIONS				ELECTRIC		STEAM / HOT WATER
Voltage 208-240/60/1~ + G		N° x AWG / A		-		3 x 12 /20A
Voltage 208-240/60/3~ + G		N° x AWG / A		4 x 5 / 60A		4 x 12 / 20A
Voltage 440-480/3 ~ + G		N° x AWG / A		4 x 8 / 40A		-
Steam inlet (Steam model)		inch		3/4"		
Maximum steam consumption (Steam model)		lbs/h		15		
Water inlet		inch		3/4"		
Water main pressure		Kg/cm2		2-4		
Maximum water consumption		Gal/h		46.3*		
Drain		mm/inch		3"		
Drainage capacity		Gal/min		52.8		
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width		In		38.54/41.2		
Net Depth / Gross Depth		In		42.52/47.7		
Net Height / Gross Height		In		61.02/71.3		
Net weight / Gross weight		Lbs.		1156.5/1209.4		
Volume		Ft3		80.5		

* Programme No. 20, 75% load

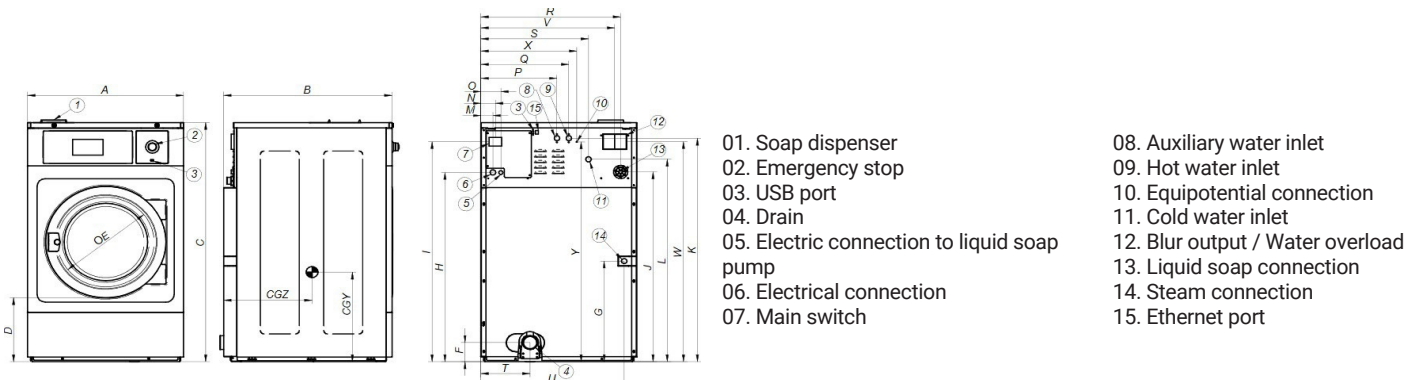

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWH-65	mm	979	1080	1550	560	460	125	490	1282	1450	1259	1465	1354	61	74	101	481	561	861	673	367	909	831	1424	624	1.510	773	735
	In	38.54	42.52	61.02	22.05	18.11	4.92	19.29	50.47	57.09	49.57	57.68	53.31	2.40	2.91	3.98	18.94	22.09	33.90	26.50	14.45	35.79	32.72	56.06	24.57	59.45	30.43	28.82